DULLES GLASS
LOVE YOUR GLASS

**Measurement Sheet Tela Fixed or Swinging**

**Tools required:**

| | |
|---|---|
| Tape Measure | Pencil |
| Painters Tape | 9 Inch Torpedo Level |

**Use this form to make notes of measurements**

**1)** Place 9” level on threshold in at at least 3 places - slope needs to be towards interior of shower*

**2)** Measure the width of the threshold - Minimum requirement is 2½”

a) Place a piece of painters tape at each end and mark the middle with a pencil

**3)** Measure to the height of the opening overall from the middle of the threshold mark up to where you would like the top of the door to be

a) Place a small piece of painters tape there and then mark with a pencil

**4)** Measure the width in a minimum of 3 places (see diagram below)


a) Take the longest measurement minus the shortest

b) If the difference of these two distances is a 1/4" or less you can go to **Step 5**

c) If the difference of these two distances is greater than 1/4" but not more than 7/16" place an order with U-Channel, not Clamps

d) If greater than 7/16", **go to step 6** to take an accurate measurement if out of square

**5)** Determine the overall width you would like the Tela to be, leave at least 22" for an opening.

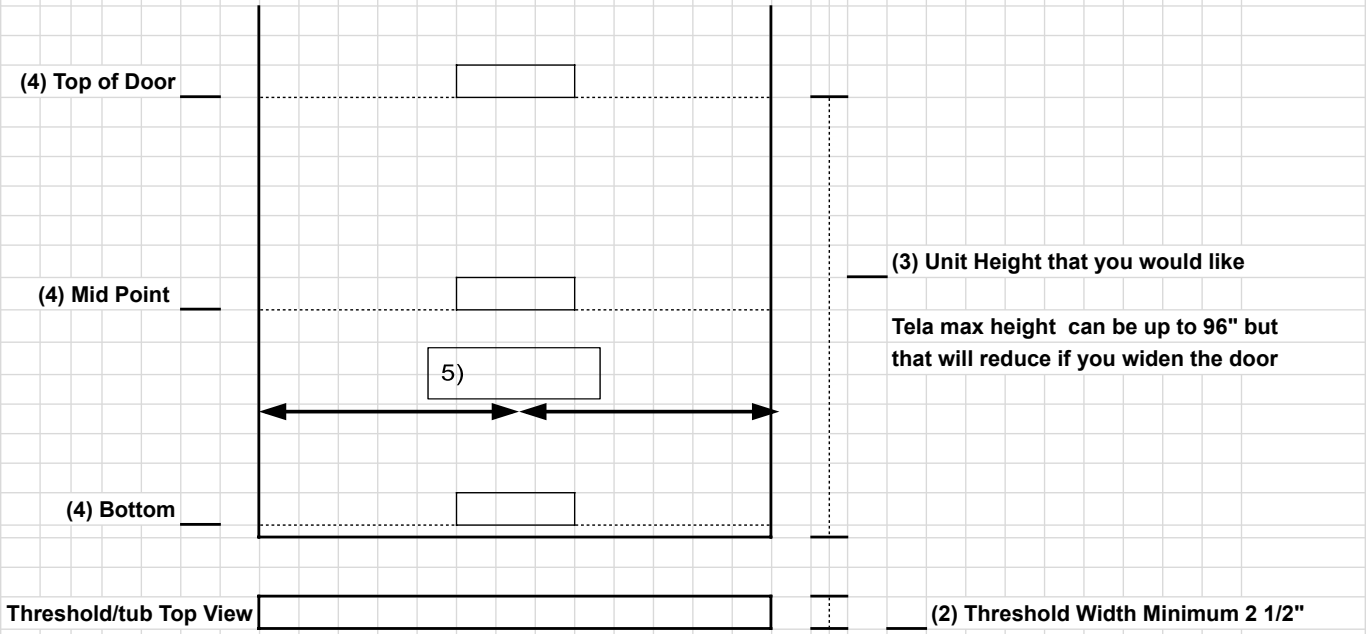


**Special Notes:**

Showerheads should never be positioned opposite a door or other opening.

(Exceptions may be made for smaller or low-flow shower heads or shower heads that point straight down at the floor.)

If you have an acrylic surround, the Metro or Eclipse would be the doors to choose. A hinge can't be attached to a surround.